

Length:

Description of contents

- Aluminium carrier (1)
- Pre-drilled, countersunk fixing holes (2)
- Push-fit gasket (3)
- Bag of screws
- Fitting instruction

Tools required for installation

- Tape measure
- Saw (power or hand)
- Screw driver
- 2mm drill bit
- Drill (power or hand)
- Knife
- Pencil or Marker
- Router (Rebated Installation)

Other Integrity™ Architectural Seals include:

- Door Perimeter Seals
- Door Bottom Seals
- Automatic Door Bottom Seals
- Threshold Plates
- Brush Seals
- Magnetic Seals

Contact your nearest Kilargo office for further details.

Installation detail: Face fixed

It is not necessary to remove the door from its hinges unless otherwise specified.

- Step 1** Remove the seal from the packaging and measure the height of the meeting stile.
- Step 2** Cut the aluminium carrier to required length.
- Step 3** Cut the semi-rigid gasket to the required length.
- Step 4** Determine the door handing and position the carrier against the appropriate meeting stile and mark out the hole locations with a pencil.
- Step 5** Drill pilot holes with a 2mm drill bit (if required).
- Step 6** Screw fix the aluminium carrier length to the meeting stile using the screws supplied.
- Step 7** Press the gasket into the aluminium carrier (as illustrated below). There are no fixings here, it is a simple interference fit.
- Step 8** Close the door and ensure the seal makes uniform contact with the opposite door leaf.

Installation detail: Rebated

- Step A** Determine the door handing and remove the door leaf to which the seal is to be fitted.
- Step B** Using a router, rebate a 13.5mm wide x 1.5mm deep groove to the stile.
- Step C** Re-hang the door and follow fitting instruction steps 1 to 8 of the "Face-fixed to Meeting Stiles".


We recommend the IS7061 seal be fitted with the Kilargo Integrity™7000 series perimeter seal and an 8000 series automatic door bottom seal.

Important


Ensure that the installation of this product does not impede the opening or closing of the door. It is recommended to check the adjustment of the door seal periodically to ensure the door assembly to which it is fitted, closes and latches properly.

Note

Recommendations as to methods for use of materials and construction details are based on the experience and knowledge of Kilargo and are given in good faith as a general guide and service to designers, contractors and manufacturers. Kilargo reserves the right to make alterations or delete any installation detail without prior notice.



Press the gasket into the aluminium carrier

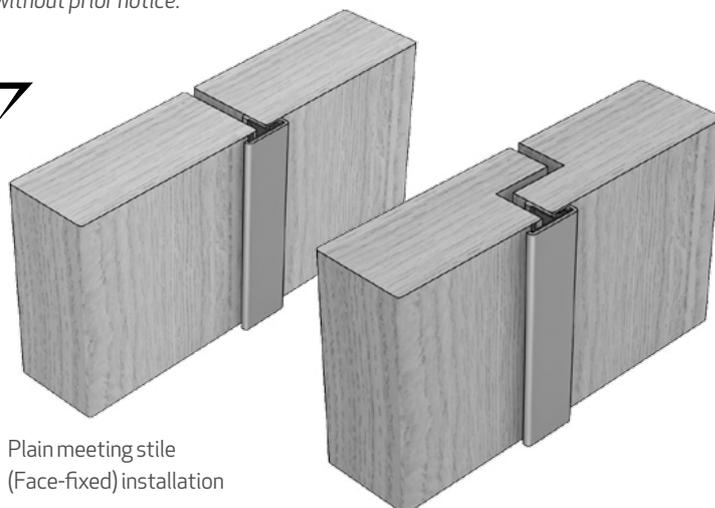

Rebated meeting stile installation